

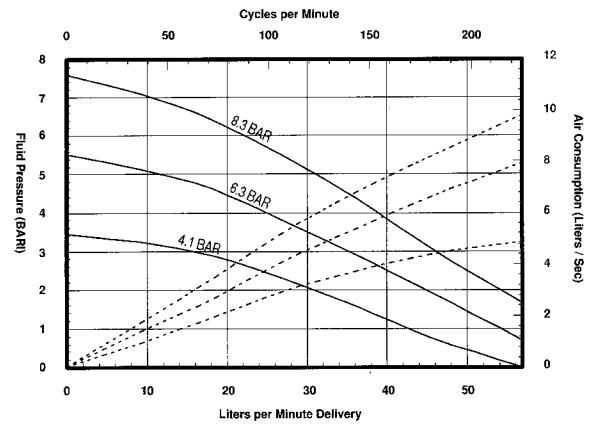


Performance Specifications

AIR INLET PRESSURE RANGE:	0-150 PSI (0-10.3 bar)
FLUID PRESSURE RANGE:	0-150 PSI (0-10.3 bar)
MAX. REC'D CYCLES PER MINUTE:	75
DISPLACEMENT In ³ (cm ³) PER CYCLE:	18.8
VOLUME/CYCLES:	10.4 oz. (307.7 ml)
CYCLES PER GALLON (LITER):	12.3
MAXIMUM WORKING FLOW RATE:	9-GPM (34.1-lpm)
MAXIMUM FLOW RATE:	18 gpm (68.1 lpm)
NOISE LEVEL:	77.8 bd(A) @ 60 psi, 40 cycles per minute
RATIO:	1:1
AIR MOTOR DIAMETER:	2" (5.08 cm)
STROKE:	6" (15.24 cm)
AIR INLET:	1/4"-18 NPT 1 (F)
MATERIAL INLET:	Immersed
MATERIAL OUTLET:	3/4"-14 NPTF - 1 (F)
PUMP CONSTRUCTION:	Carbon Steel
LOWER PUMP REPAIR KIT:	637081 (-1 Buna) 637083 (-3 Teflon)

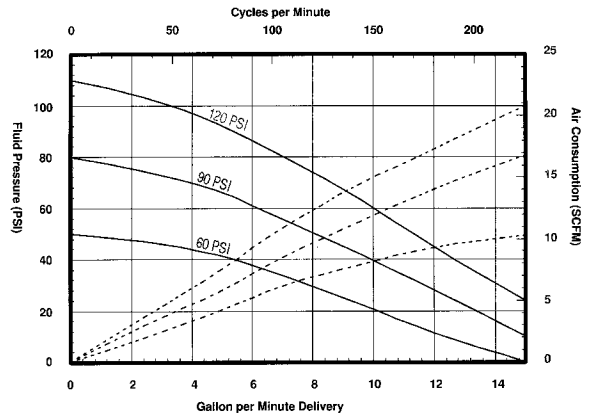

Dimensional Data

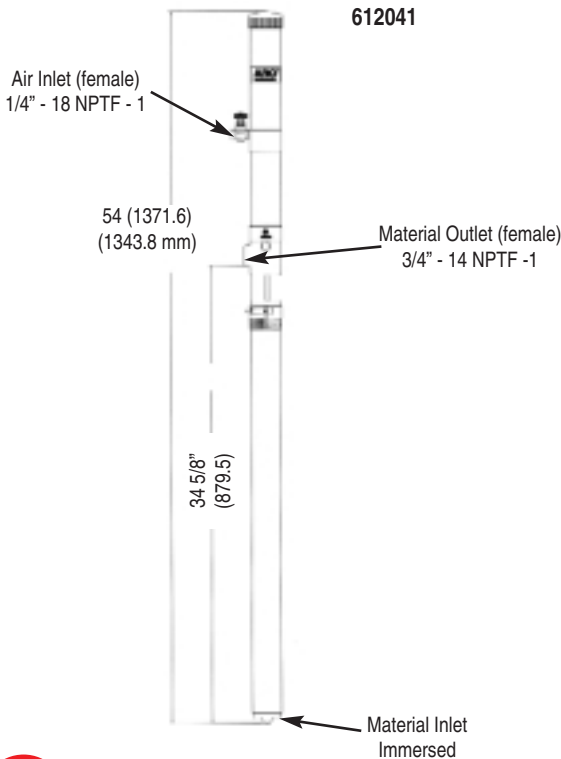

Accessories

- AIR F/R/L: C28123-600
- Wall Mount: 61113
- Muffler: 61879
- AIR Line Oil: 62274 (1 Quart)

See Page 35 for Piston Pump accessories.



C28123-600

Ordering

Base Model	Buna Packings
6 1 2 0 4 1	- 1
Base Model	Teflon Packings
6 1 2 0 4 1	- 3

• 5-Year Warranty!

