


Pump Performance

Hydraulic Inlet Pressure Range . 65 - 1200 PSI (4.5 - 81.6 bar)
 Fluid Pressure Range 180 - 4320 PSI (12.2 - 293.8 bar)
 Required H-power @ 50 cpm . . 3.2 @ 1200 (82.8 bar)
 Hydraulic flow req'd @ 50 cpm . 8.7 GPM (32.9 lpm)
 Max. Rec'd Cycles Per Minute . 50
 Displacement Per Cycle 6.9 in³ (113 cm³)
 Volume / Cycle 3.8 oz. (112 ml)
 Cycles Per Gallon (Liter) 33 (8.8)
 Flow @ 50 Cycles / Minute . . . 1.5 GPM (5.7 lpm)
 Maximum Temperature Limit . . 130° F (54° C)

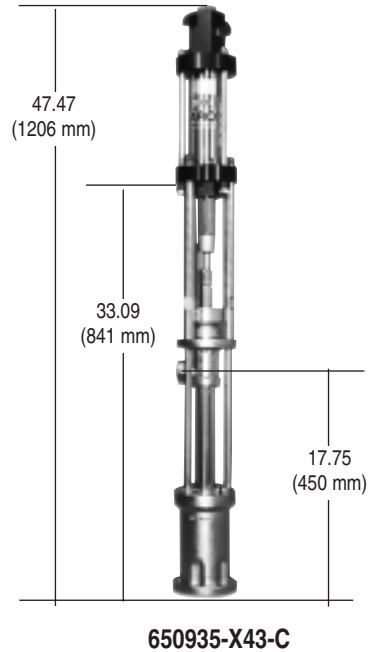

Pump Specifications

Lower Pump Material Carbon Steel
 Plunger Material 17 - 4 Stainless Steel, (Chrome Plated)
 Cylinder Material Carbon Steel (Nickel Plated)
 Hydraulic Motor 67147
 Motor Repair Kit 637315
 Motor Size 2.062 in² (13.3 cm²)
 Stroke 5.75" (14.6 cm)
 Hydraulic Inlet 3/8" NPT(F)
 Hydraulic Return 1/2" NPT(F)
 Chop Check Pump Model 66266-X43-B
 Lower Pump Repair Kit 637074-X43-B
 Material Inlet Bolted Flange
 Material Outlet 1" NPT(F)
 Weight 68 lbs (30.9 Kgs.)

Ordering

6 5 0 9 3 5 -X 4 3 -C

Packings _____
 3 : Teflon
 C : UHMW-PE
 G : UHMW-PE/Leather Staggered
 P : UHMW-PE/Teflon Staggered (Upper),
 UHMW-PE (Lower)
 R : Teflon/UHMW-PE Staggered (Upper),
 Teflon (Lower)

Accessories

Floor Mount: 65138
 Wet Sol: 66333-B
 Rams: Page 14

