

Pump Performance

- Air Inlet Pressure Range 30 - 120 PSI (2 - 8.3 bar)
- Fluid Pressure Range 1290 - 6450 PSI (87.7 - 438.7 bar)
- Max. Rec'd Cycles Per Minute . 60
- Displacement Per Cycle 2.8 in³ (45.8 cm³)
- Cycles Per Gallon (Liter) 82.5 (21.7)
- Flow @ 75 Cycles / Minute 0.9 GPM (3.4 lpm)
- Noise Level @ 60 Psi 80 db(A)

Pump Specifications

- Lower Pump Material 15 - 5 Stainless Steel
- Plunger Material 17.4 Stainless Steel (Chrome Plated)
- Cylinder Material 15 - 5 Stainless Steel (Chrome Plated)
- Air Motor 65440
- Motor Repair Kit 61268
- Motor Diameter 4-1/4"
- Stroke 4"
- Air Inlet 1/2" NPT(F)
- Exhaust Port 1-1/4" NPT(F)
- Lower Pump End Series:
- Model 67121-P43 67101-P43
- Model 67121-P48 67101-P48
- Lower Pump Repair Kits:
- Model 67121-P43 637291-P43
- Model 67121-P48 637291-P48
- Material Inlet Follower Plated Mounted
- Material Outlet 1/2" NPT(F)
- Weight 44 lbs. (20 kgs.)





Ordering

6 7 1 2 1 - P 4 X

Packing

- 3 : UHMW-PE/Teflon Staggered (Upper),
UHMW-PE Grooved Piston (Lower)
- 8 : UHMW-PE/Teflon Staggered (Upper),
UHMW-PE Single Lip Cup (Lower)

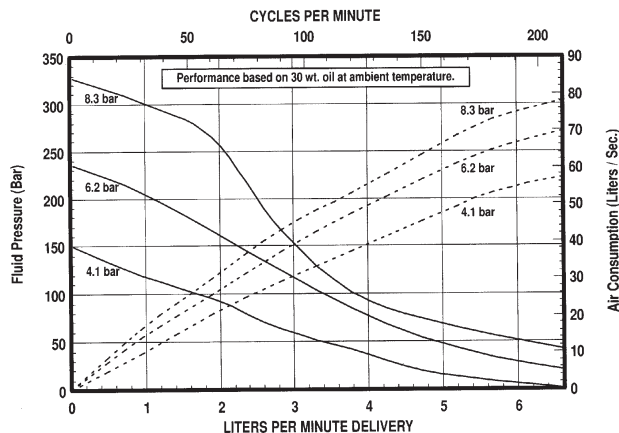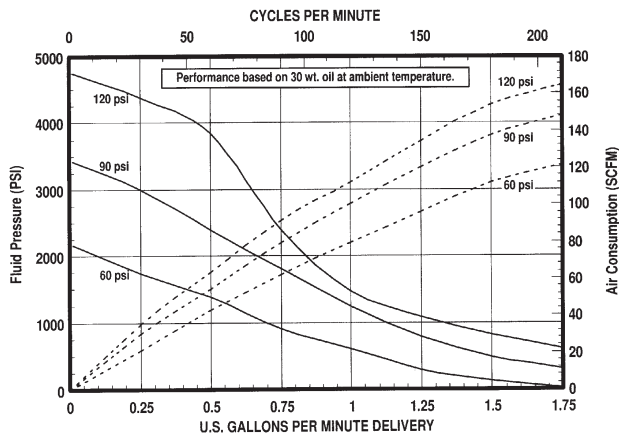

Accessories

- Air F/R/L: C28241-810
- Airline Oil: 62274
- Air Motor Muffler: 91790
- Wet Sol: 66333-B
- Follower Plate: 651841-1
- A.S.A.P. Packages: 650541-1
650543-1