

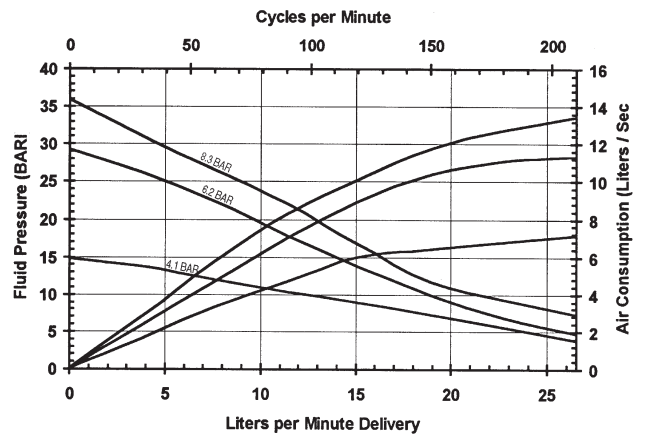


Performance Specifications

AIR INLET PRESSURE RANGE:	150 (10.2 bar)
FLUID PRESSURE RANGE:	120-600 PSI (8.1-40.8 bar)
MAX. REC'D CYCLES PER MINUTE:	120
DISPLACEMENT In³ (cm³) PER CYCLE:	8.2 (134.3)
CYCLES PER GALLON (LITER):	28 (7.4)
FLOW @ 120 CYCLES PER MINUTE:	4.2-GPM (15.8-lpm)
NOISE LEVEL @ 100 PSI:	85 db(A)
LOWER PUMP MATERIAL:	Carbon Steel
PLUNGER MATERIAL:	Carbon Steel
AIR MOTOR:	66913
MOTOR REPAIR KIT:	637316
MOTOR DIAMETER:	3" (7.6 cm)
STROKE:	3" (7.6 cm)
AIR INLET:	1/4" - 18 N.P.T.F.-1(f)
LOWER PUMP REPAIR KIT:	637176 for NM2304A-X1-311
MATERIAL INLET:	1-1/2" NPT(F)
MATERIAL OUTLET:	3/4" NPT (F)
WEIGHT LBS. (Kgs.):	NM2304A-11-311 = 32 (14.5) NM2304A-41-311 = 46 (20.9)
2" BUNG ADAPTER:	Included

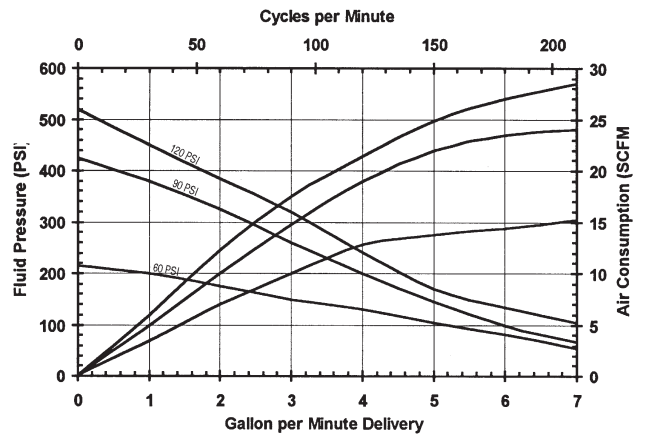

Dimensional Data

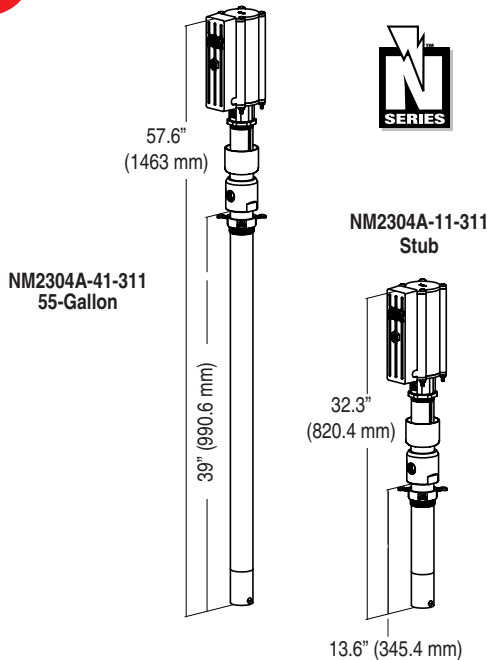

Accessories

- AIR F/R:** P29122-600
 - Wall Mount:** 61113
 - Wet Sol:** 66333-B (1 Quart)
- See Page 35 for Piston Pump accessories



P29122-600

Ordering

Base Model					Type		Packings						
N	M	2	3	0	4	A	-	X	1	-	3	1	1
						1			1				
						4			3				
						Stub (Wall Mount)				Glass-Filled Teflon (Upper/Lower)			
						55-Gallon (205 Liters)							

5-Year Warranty!

